





# Roboter-X-Zangen


Stand: 09.2008


## Beispiele für den industriellen Einsatz (auszugsweise)

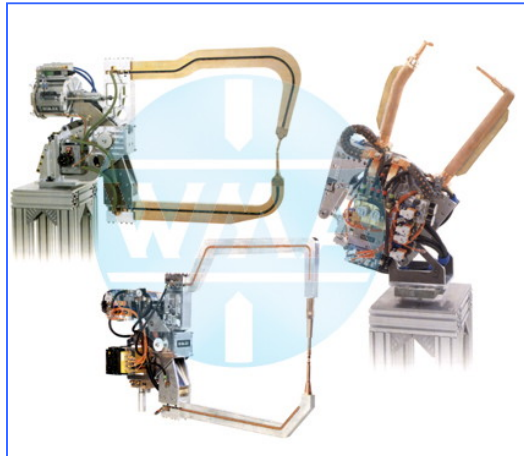



### Elektrodenarme für Roboter-X-Zangen


	Type	E-Arm	Abstand
	031	60 x 40	250
	032	60 x 40	300
	033	60 x 40	400
	034	60 x 40	500

	Type	E-Arm	Abstand
	061	90 x 40	250
	062	90 x 40	300
	063	90 x 40	400
	064	90 x 40	500

	Type	E-Arm	Abstand
	071	60 x 40	250
	072	60 x 40	300
	073	60 x 40	400
	074	60 x 40	500

	Type	E-Arm	Abstand
	141	60 x 40	250
	142	60 x 40	300
	143	60 x 40	400
	144	60 x 40	500

	Type	E-Arm	Abstand
	156	bis Ø 49	150
	157	bis Ø 49	200
	158	bis Ø 49	250
	159	bis Ø 49	300
	160	bis Ø 49	350

	Type	E-Arm	Abstand
	171	90 x 40	500
	172	90 x 40	550
	173	90 x 40	600
	174	90 x 40	650

WMA ist Generalvertreter für NIMAK-Schweißmaschinen in Baden-Württemberg

Technische Änderungen, die dem Fortschritt dienen, behalten wir uns vor.

© by WMA Schmidt & Bittner GmbH, Baumwaide 23, D-74360 Ilfsfeld-Auenstein, Tel. +49 7062 9066-0, Fax +49 7062 9066-20  
 info@wma-sb.de oder wma-sb@t-online.de, <http://www.wma-sb.de>

Rob-X-Zangen-1