




CL 123

Version: 01-2011

pneumatically operated, water cooled* C spot welding gun

- compact design
- double stroke mechanism
- transformer, fully encapsulated in plastic
- contact pressure function in the handle
- cardan suspension
- gun with 4 m power supply cable and switch
- low-maintenance design

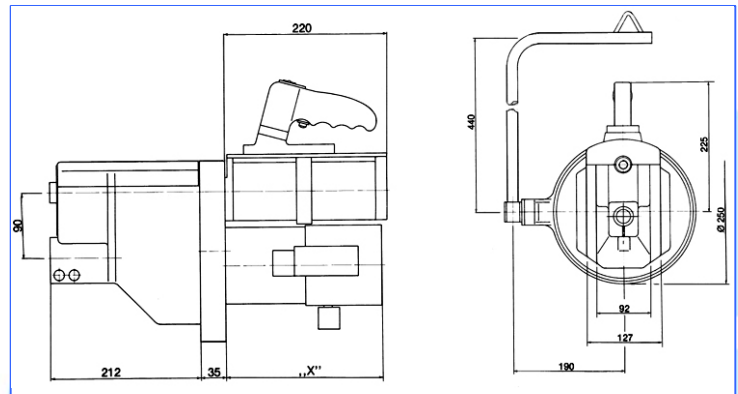

X = 263 mm

	CL 123
Welding performance*	2.5 + 2.5 mm
Rated power (at 50% ED)	14 kVA
Supply power	33 kVA
Connection section	4 mm ²
Fuse, delayed action	35 A
max. welding current	12 kA
Electrode force at 6 bar	185 daN
Arm spacing	100 mm
Depth of throat	220 mm
Stroke (WCS / WS)**	80 / 20 mm
Weight (without electrode arms)	29 kg
Order-number	XK4.107.C01

* The welding performance data quoted refer to steel, non-continuous machining.

** Stroke (WCS / WS) 80 / 20 mm available for an additional charge.

Different welding controls can be used.

*This kit does not include a water chiller!

WMA is general distributor for NIMAK welding machines in Baden-Wuerttemberg

We reserve the right to make changes which are in the interest of technical progress.

© by WMA Schmidt & Bittner GmbH, Baumwaide 23, D-74360 Ilsfeld-Auenstein, Tel. +49 7062 9066-0, Fax +49 7062 9066-20
info@wma-sb.de or wma-sb@t-online.de, <http://www.wma-sb.de>

CL123-1



CL 123

Version: 01-2011

Optional hand grips for spot welding guns

Standard grip



integrated grip with two additional switches



Hand grip with digital switch



Optional locking lever

