



# Akzent 3000

Version: 01-2011

## Microprocessor thyristor controls

- Constant current control
- Complete process monitoring
- simple and pleasant to use
- All parameter settings and welding process should be visible at a glance
- Changes of parameters only shall be possible with a corresponding right
- Possibility to make changes of parameter and configuration settings via PC



The welding controller Akzent 3000 sets new standards in the mid range class of welding controllers for resistance welding applications. The graphical display combines easy operation, with functionality orientated on practical requirements. The completely new developed hard- and software concept offers you a wide range of individual expansion possibilities. This means reliable investment costs for possibly increasing requirements in the future.

The way of operation is easy to understand and user friendly. Change of operation language is possible. The graphical display shows all important information's in full text form. All important functions can be reached by one keystroke. The electronic key assures that changes of welding parameters and monitoring settings can be made only by authorized operators.

The operating terminal T-3000 is connected by only one cable to the system controller SC-3000. System controller and thyristor module are built in one case. These compact form offers a lot of possibilities of application. Integrated mounting inside of the machine case is possible as well as a separat mounting of the operating terminal outside of the security fence or in the machine panel.

We reserve the right to make changes which are in the interest of technical progress.

© by WMA Schmidt & Bittner GmbH, Baumwaide 23, D-74360 Illfeld-Auenstein, Tel. +49 7062 9066-0, Fax +49 7062 9066-20  
info@wma-sb.de oder wma-sb@t-online.de, <http://www.wma-sb.de>


**Akzent3000-1**



# Akzent 3000

Version: 01-2011

## Welding times

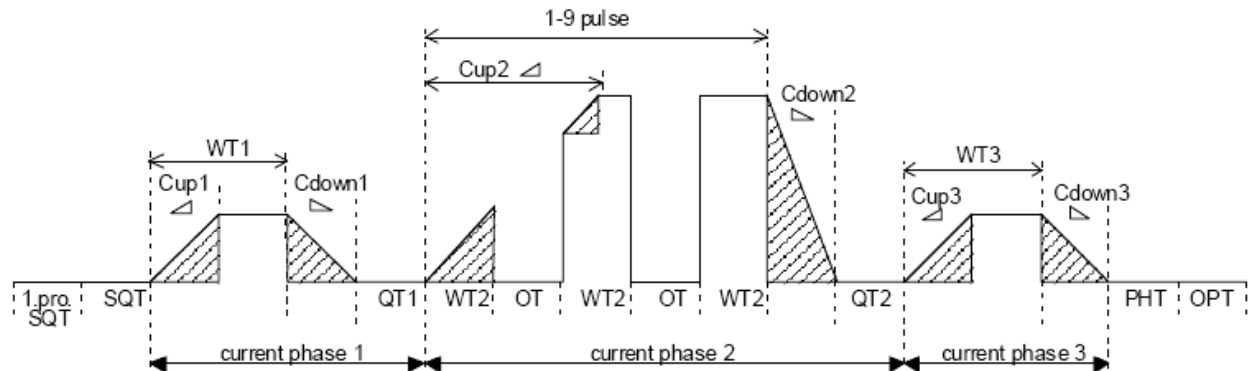

## Technical data

### Operating terminal T-3000

Size (WxHxD) mm:	182 x 129 x 45 (without connectors)
Display:	4,3" TFT color display with 480x274 pixel resolution
Operating:	Navigation via rotary knob or touch screen Change of settings via rotary knob 7 function keys for direct stroke of the most important functions Assignment of different access rights via digital key
Operating language:	German or English, other languages on demand

### System controller SC-3000/2PH

Solenoid valve:	2 SV outputs 24V DC, maximal switching capacity 25 VA
Mains compensation:	Variation of +15% to -20% of mains voltage can be compensated
End of cycle:	free programmable
Locking contact:	free programmable
Welding programs:	128
50/60 Hz:	automatic detection
Operating mode:	Single spot, serial spot, seam welding
Digital inputs:	10 free programmable inputs for start, pressure contact, ready for operation, with/without current, program selection, ext. locking
Digital outputs:	10 free programmable outputs for solenoid valve, locking contact, end of cycle, monitoring alarms, end of counter
Analogue outputs:	2 analogue outputs (0-10V) for proportional valve control
Measuring input channels:	1 analogue input channel for secondary current sensor 2 analogue input channels for voltage drop or primary current sensor, pressure or force 1 incremental input channel path sensor (10µm resolution)
Welding times:	16 times, including 12 current times (look at picture of welding time)
Control mode:	Constant current control selectable for primary or secondary current
Monitoring:	Monitoring of sum values and envelope curves of current, voltage and path according to the configuration settings
PC interface:	100 MB Ethernet
Field bus interface:	optional on demand
Thyristor:	100A – 2300A water cooled (air cooled on demand) Please ask for load diagram
Size (WxHxD) mm:	290 x 166 x 150 (without connectors)

We reserve the right to make changes which are in the interest of technical progress.

© by WMA Schmidt & Bittner GmbH, Baumwaide 23, D-74360 Ilsfeld-Auenstein, Tel. +49 7062 9066-0, Fax +49 7062 9066-20  
info@wma-sb.de oder wma-sb@t-online.de, <http://www.wma-sb.de>

Akzent3000-2